

## BUTTERFLY VALVE


### STANDARD BUTTERFLY VALVE

Quick action with a quarter turn to go from fully open to fully close with positive lock. Butterfly valve functions both as shut-off and throttling for sizes from 3/4" to 2".

All wetted area are made of stainless steel. The knob is made of polymer.

Specifications:

- \* Vacuum range:  $1 \times 10^{-8}$  Torr
- \* Op. temperature:  $-55^{\circ}\text{C}$  to  $225^{\circ}\text{C}$

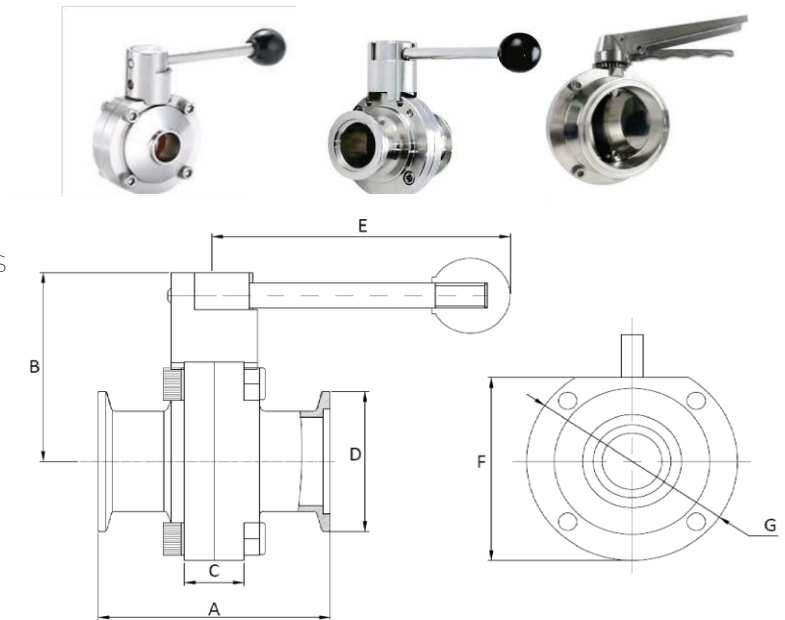

### KF Flange Butterfly Valve

NOM. Size	ISO Ref	A	B	C	D	E	F	G
3/4"	KF16	2.87	2.64	0.87	1.18	4.61	2.83	3.07
1"	KF25	2.87	2.64	0.87	1.57	4.61	2.83	3.07
1-1/2"	KF40	3.38	2.64	0.87	2.17	4.61	2.83	3.07
2"	KF50	3.57	2.99	0.87	2.95	4.49	--	3.90

- \* Available in tube end
- \* Internal seating available in FKM, EPDM